

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number  
**WO 2004/039421 A1**

(51) International Patent Classification<sup>7</sup>: A61L 15/14

Soo-Chang [KR/KR]; 63-103, Jangwe-dong, Sungbuk-gu, 136-827 Seoul (KR). KANG, Sun-Ae [KR/KR]; Mokryun Apartment 308-305, 1052-3, Hoge-dong, Dongan-gu, 431-080 Anyang-city, Kyunggi-do (KR).

(21) International Application Number:  
PCT/KR2003/002242

(22) International Filing Date: 23 October 2003 (23.10.2003)

(74) Agent: YOON, Hang-Shik; 9th Floor, BYC Bldg., 648-1, Yeoksam-dong, Gangnam-gu, 135-080 Seoul (KR).

(25) Filing Language: Korean

(81) Designated States (*national*): BR, CA, CN, ID, IL, IN, JP, MX, NZ, PH, PL, SG, US.

(26) Publication Language: English

(30) Priority Data:  
10-2002-0066191 29 October 2002 (29.10.2002) KR

(84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(71) Applicant (*for all designated States except US*): BIOPOL CO., LTD. [KR/KR]; 226-8, Bacto-ri, Hyangnam-myun, 445-924 Hwasung-city, Kyunggi-do (KR).

Published:


- with international search report
- with amended claims

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): PARK, Myung-Hwan [KR/KR]; A-2301, Daelim Acrovil, 467-6, Dogok-dong, Gangnam-gu, 135-270 Seoul (KR). LEE,

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: POLYURETHANE FOAM DRESSING FOR WOUND FILLER AND METHOD FOR MANUFACTURING THEREOF

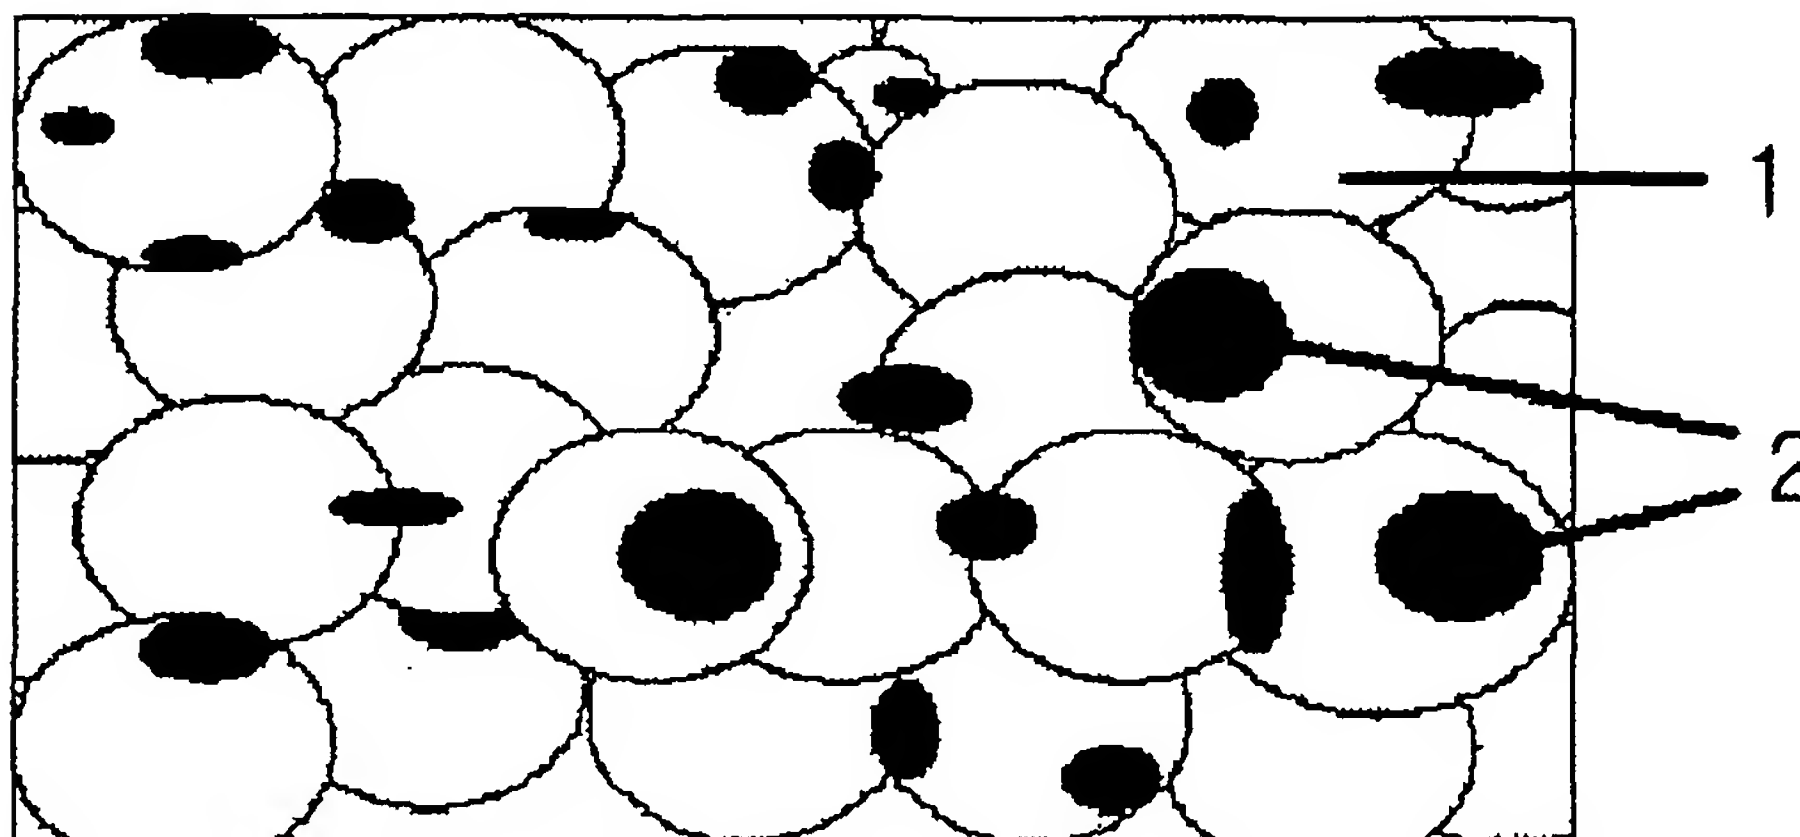

(57) Abstract: Disclosed is a polyurethane foam dressing for a wound filler, which includes a hydrophilic polyurethane foam including a plurality of open cells with a diameter of 50 to 400  $\mu\text{m}$  and a plurality of pores with a diameter of 10 to 80  $\mu\text{m}$ , and a method of manufacturing the same. The method includes mixing and agitating 40 to 75 wt% pre-polymer, 15 to 45 wt% foaming agent, 5 to 35 wt% crosslinking agent, and 0.5 to 15 wt% additive containing a surfactant, a moisturizing agent, and a pigment, injecting the resulting mixture into a mold, and foaming the resulting mixture injected into the mold. The foam dressing is advantageous in that it has relatively high moisture vapor transmission rate, absorptivity, and absorption rate. Additionally, after the foam dressing absorbs an exudate, its physical properties are rarely changed, thus it does not leave a portion thereof in the wound.

WO 2004/039421 A1